


## MGS1400HV

**60Hz/4.16kV**

**POWER RATING (0.8 P.F.)**      **MODEL CODE**  
**PRIME**                      **1230 kW**                      **64CP-T63M**

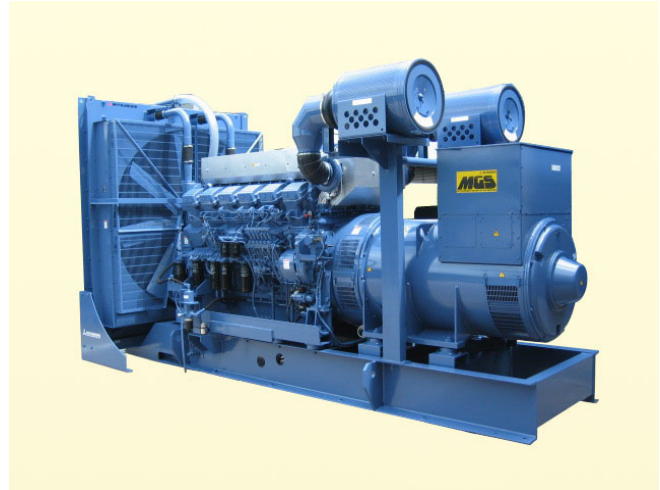

MGS1400HV with typical options

### CONDITIONS & DEFINITIONS

#### Prime [PRP] : Code:CP

Applicable for supplying power with varying load instead of the utility for an unlimited time. +10% overload is allowed in accordance with ISO3046/1. Prime power in accordance with ISO15550,ISO3046/1,JIS8002-1,DIN6271 and BS5514. Prime power in accordance with ISO8528.

#### Conditions:

Engine ratings are based on SAE J1349 standard conditions. These ratings also apply at ISO3046/1, DIN6271 and BS5514 standard conditions.

Fuel rates are based on fuel oil of 35° API (16°C or 60° F) gravity having a LHV of 42,780 kJ/kg (18,390 Btu/lb.) when used at 29°C (85° F) and weighing 838.9 g/liter (7.001lbs./U.S. gal.).

Note: \* Please consult with your nearest Mitsubishi MGS dealer for overload and additional rating requirements.

### DIMENSION (Reference Data)

			PRIME
			1230 kW
Overall dimensions	L : Length	mm	4870
	W : Width	mm	2160
	H : Height	mm	2700
Total Weight (Dry)		kg	10800
Total Weight (Wet)		kg	11400

## MGS SERIES DIESEL ENGINE: MITSUBISHI S12R-PTA2-S

V-12, 4 stroke-cycle water-cooled, turbocharged and aftercooled

### ENGINE SPECIFICATIONS & TECHNICAL DATA

Bore	mm	170
Stroke	mm	180
Displacement	L	49
Piston speed	m/sec.	10.8
Compression ratio		14
Lubricating oil capacity	L	180
Coolant capacity without radiator	L	125
Coolant pump external resistance	m water	5.0
Coolant pump flow rate	L/min	1850
Cooling fan airflow rate	m <sup>3</sup> /min	2040
Cooling fan air flow restriction	kPa	0.1
Ambient air temperature	°C	40
Allowable exhaust back pressure	kPa	6.0
Exhaust flange size (internal diameter)	mm	300

### ENGINE OPERATING DATA

		PRIME 1230 kW
Gross Engine Power*	kWm	1290
Brake mean effective pressure	MPa	1.8
Regenerative absorption	kW	144
Noise Level at 1 m (excluding: intake, exhaust & fan)	dB(A)	110
Fuel consumption load 100%*	L/hr.	334
Fuel consumption load 75%*	L/hr.	256
Combustion air inlet flow rate	m <sup>3</sup> /min	115
Exhaust gas flow rate	m <sup>3</sup> /min	302
Exhaust gas temperature	°C	520
Heat rejection to coolant	kW	832
Heat rejection to exhaust	kW	1059
Heat rejection to atmosphere from engine	kW	100
Heat rejection to atmosphere from generator	kW	57

\* WITH FAN basis.

Deration for engine

Note: Please consult with your nearest Mitsubishi MGS dealer

### ENGINE STANDARD EQUIPMENT

Aftercooler  
 Turbocharger filter  
 Structure steel base  
 Crankcase breather  
 Charging alternator  
 Lubricating oil cooler  
 Fuel filters, full flow paper element  
 Fuel transfer pump, gear driven, plunger type  
 Electronic type governor  
 Jacket water heater  
 Jacket water pump, gear driven  
 Lubricating oil filter, full flow paper element  
 Lubricating oil pump, gear driven  
 Exhaust dry manifold  
 Radiator, blower fan, fan drive  
 Manual shutoff  
 24V DC electric starting motor

## MGS SERIES 7310 GENERATOR CONTROL PANEL

### Type & Design

MGS standard 7310 programmable microprocessor control-automatic start/stop panel, generator breaker control, indicating the operational status and fault conditions; automatically shutting down the engine and indicating the engine failure by means of LCD display and LEDs on the front panel.

### Controls & Monitoring

- ◆ Mode selection & start engine button with interlock key switch system
- ◆ Menu navigation button
- ◆ LCD display for: AC amperage-each phase and earth current, AC voltage-each phase and neutral, Frequency Hz, Operation hours run, Lub. Oil pressure, Lub. Oil temperature, Cooling water temperature, Generator Load kW/kVA/kVar, Generator Load kWh/kVAh/kVarh
- ◆ Operation status LED indicators
- ◆ CB control buttons
- ◆ Mute/Lamp test button
- ◆ Voltage adjuster
- ◆ Speed adjuster
- ◆ Emergency stop pushbutton
- ◆ Provided 5 outputs for status as standard equipment (Programmable 8 outputs available as option)

### Safety Shutdown Protection and LED Indicators

High engine temperature, Low oil pressure, Fail to start, Generator Over Speed/Frequency, Generator Under Speed/Frequency

Generator High Voltage, Generator Low Voltage, Oil pressure sender circuit, Loss of Speed signal, Emergency stop, High crankcase internal pressure (MGS-C continuous only)

### Mounting

Fabricated cubicle mounted on individual bracket with anti-vibration isolator

### Electrical Design

In accordance with BS EN 60950 Low Voltage Directive, BS EN 61006-2 and 61006-4 EMC Directive. The optional interface can provide real time diagnostic facilities.

## Generator Control Panel Description

- 3 position operation mode control key switch (ACTIVE, PANEL LOCK, STOP/RESET)
  - Manual button
  - Auto button
  - CB open button (Manual only)
  - CB close button (Manual only)
  - Start engine button (Manual only)
  - Stop/Reset button (Manual only)
  - Mute/Lamp test button (Manual only)
  - Voltage adjusting trimmer
  - Speed adjusting trimmer
  - Emergency stop pushbutton
- LCD display accessed by scroll pushbutton
  - Generator volts L1-N, L2-N, L3-N
  - Generator volts L1-L2, L2-L3, L3-L1
  - Generator amps L1, L2, L3
  - Generator Earth Current
  - Generator Frequency Hz
  - Engine speed RPM
  - Engine oil pressure (PSI & Bar)
  - Engine cooling water temperature (°C & °F)
  - Engine Lub. Oil temperature (°C & °F)
  - Battery volts
  - Engine hours run
  - Generator Load kW, kVA, kVar
  - Generator Load kWh, kVAh, kVarh
  - Power Factor
  - Generator Phase Sequence
- Visual indicators on LCD display
  - Shutdown alarm
  - Warning alarm
  - High coolant temperature
  - High exhaust gas temperature
  - Low oil pressure
  - Charge fail
  - Over-speed
  - Under-speed
  - Electrical trip
  - Fail to stop
  - Generator high current
  - Over voltage (AC)
  - Under voltage (AC)
  - Over voltage (DC)
  - Under voltage (DC)
  - Auxiliary indication
  - Auxiliary alarm (warning or shutdown)
  - Common alarm
  - Over frequency
  - Under frequency
- Visual indication alarm and automatically shutdown
  - High engine temperature
  - Low oil pressure
  - Fail to start
  - Over-speed
  - High voltage
  - Low voltage
  - Over frequency
  - Under frequency
  - Oil pressure sender open circuit
  - Loss of speed signal
  - High Crankcase internal pressure (MGS-C Continuous only)
  - Emergency Stop
- Operation status indicated by LED
  - Remote start present
  - Generator ready
  - Lubrication oil filter clogged
  - Electrical trip
- Pre-Programmed Starting Unit
  - Automatic start/stop sequence timing and delay systems configured via MS-Windows based software.

# MITSUBISHI MGS SERIES

## DIESEL GENERATOR SET

### MGS1400HV



## MGS SERIES AC GENERATOR MODEL: MG-KT63M

### Type & Design

MGS original design, single bearing, 4 pole, screen protected, self-exciting, self-regulating and brushless with fully connected damper windings, salient pole rotors, A.C. exciter and rotating rectifier unit. Direct coupled to engine and regreaseable bearing, direct drive centrifugal blower.

With Space heater.

Enclosure: Drip-proof IP22

Terminal box: Totally enclosed IP44

### Winding System

Standard 6 wire winding provides 3 phase voltage. All windings are impregnated in vacuum pressure impregnated with a special polyester resin.

Overspeed capability: 125% for 2 minutes

Insulation: Class 'H' of IEC

Temperature rise: Class 'F'

### Voltage Regulator

Fully sealed, 3 phase RMS sensing AVR with built-in protection against sustained over-excitation. This de-excites the generator after a minimum of 5 seconds.

Voltage regulation: Less than +/- 0.5% from no load to full load at any power factor between 0.8 lagging and 1.0 allowing for a 4% engine speed variation

Voltage adjustment: +/- 6%

Wave form: Less than 5% deviation

### Permanent Magnet Generator (PMG)

Electrically isolated from the main alternator stator windings powers AVR - sustaining approx. 250% of short circuit current at the AC generator output terminals for not more than 10 seconds by means of excitation voltage via AVR

### Sensors

Temperature sensors are provided as follows.

Stator winding, 2 per each phase, PT100

Bearing, PT100

### Electrical Design

In accordance with BS5000 Part 3, VDE0530, UTE51100, NEMA MG1-22, CEMA, IEC34-1, CSA22.2, AS1359 and JEC2100.

Telephone Influence Factor (TIF): Less than 50

Telephone Harmonic factor (THF): Less than 2.5%

Radio interference: Suppression is in line with the provision of VDE Class G and N

### Gen Set Option Features

- |  |   |
|--|---|
| <ul style="list-style-type: none"><li>■ ENGINE<ul style="list-style-type: none"><li>Air Cleaner, paper element dry type</li><li>Battery Kit</li><li>Battery Charger</li><li>Anchor Bolts</li></ul></li><li>■ FUEL<ul style="list-style-type: none"><li>Fuel Day Service Tank</li></ul></li><li>■ COOLING<ul style="list-style-type: none"><li>Heat Exchanger</li><li>Expansion Tank</li><li>Removal STD Radiator, Fan &amp; Fan Drive</li></ul></li><li>■ LUBRICATION<ul style="list-style-type: none"><li>Lub. Oil Priming Pump</li></ul></li><li>■ EXHAUST<ul style="list-style-type: none"><li>Exhaust Silencer</li><li>Exhaust Flexible Pipe</li></ul></li></ul> | <ul style="list-style-type: none"><li>■ GENERATOR<ul style="list-style-type: none"><li>Power Factor Regulator</li></ul></li><li>■ CONTROL PANEL<ul style="list-style-type: none"><li>Diesel Generator Integrated Communication Synthesizer (DGICS-MII)</li><li>Auxiliary Control Panel</li><li>Remote Monitor Interface</li><li>Temperature Meter for Winding &amp; Bearing</li></ul></li><li>■ SWITCHGEAR<ul style="list-style-type: none"><li>Circuit Breaker VCB</li><li>Reverse Power Relay</li></ul></li></ul> |
|--|---|



Power Systems Engine Section, Engine Sales Department  
16-5, KONAN 2-CHOME, MINATO-KU, TOKYO 108-8215 JAPAN  
TEL: 81-3-6716-4771 FAX: 81-3-6716-5854

Mitsubishi Heavy Industries, Ltd. serves for the customers with improved products continually.

Therefore specification and some materials will be changed without notice.

The International System of units (SI) is used in this publication.

